


GOODWINCH PORTABLE PETROL / DIESEL TWIN CAPSTAN WINCH With optional Rope Clutch

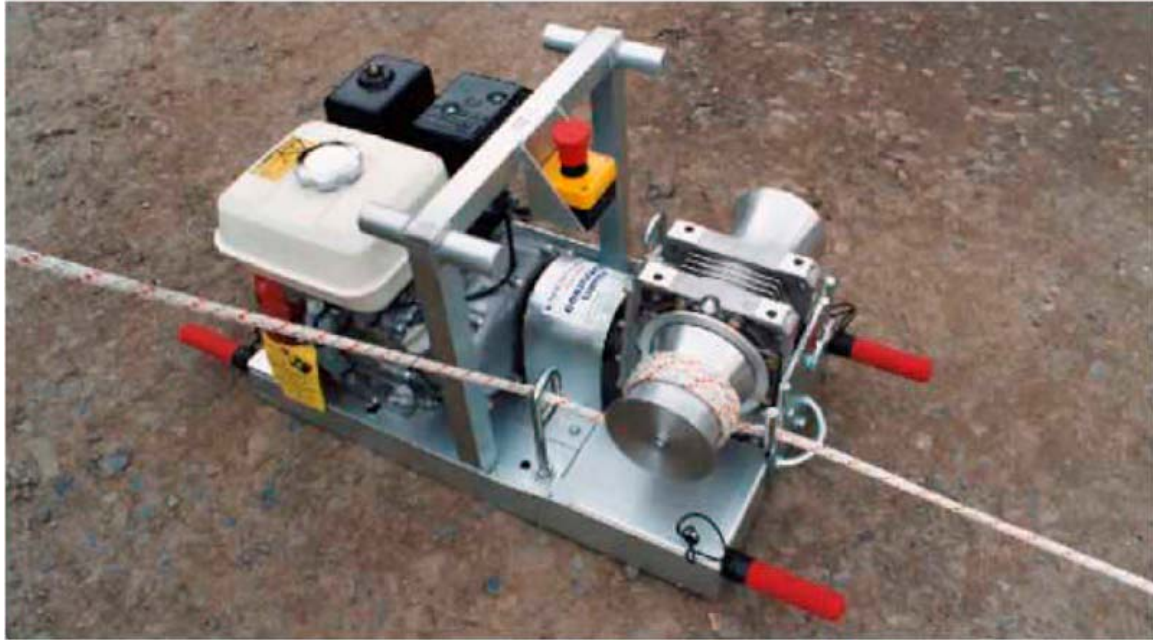

Safe, infinitely controllable pulling, holding, and lowering out with the **Goodwinch Portable Petrol or Diesel Twin Capstan Winch**. Variable speed from hold, through creep to a full speed of approx. 25 metres per minute.

Ideal for pulling cables through ducts, raising portable buildings, clearing debris from rivers, lakes and canals, forestry work, general rope rescue work, oil pollution boom handling and Steeple Jack operations etc. Work from either side or run two ropes together to halve the load. Optional rope clutch for load holding when used for raising or lowering tools, materials or equipment on National Grid pylons and similar structures.

High quality engineering and design. Reliable, easy to start Honda 5.5 HP (4 kW) engine (or optional Robin 5.5 HP (4 kW) diesel engine) with a centrifugal gearbox driving the main capstan gearbox and aluminium bollards through a flexible coupling. Aluminium frame, two man lift, removable handles for easy storage.

As used by the construction industry.



Sydney:-	Brisbane:-	Townsville:-	Melbourne:-	Perth:-	Adelaide:-
131 WOIDS AVENUE CARLTON NSW 2218 TEL: (02) 9547 1844 FX: (02) 9547 2236 sales@specialisedforce.com.au	2/68 NORTHLINK PLACE NORTHGATE QLD 4013 TEL: (07) 3256 6011 FX: (07) 3256 6055 qldsales@specialisedforce.com.au	2/16 VENESS COURT GARbutt QLD 4814 TEL: (07) 4728 8756 FX: (07) 4725 4380 nqldsales@specialisedforce.com.au	2/18 SOUTHFORK DRIVE KILSYTH VIC 3137 TEL: (03) 9761 4199 FX: (03) 9761 4966 vicsales@specialisedforce.com.au	19 AUGUSTA STREET WILLETTON WA 6155 TEL: (08) 9354 8544 FX: (08) 9354 8360 wasales@specialisedforce.com.au	316 SOUTH ROAD RICHMOND SA 5033 TEL: (08) 8352 8866 FX: (08) 8352 7257 sasales@specialisedforce.com.au

Visit Our Website: www.specialisedforce.com.au

SPECIFICATIONS

Twin Capstans.....
Capstan Gearbox.....
Flexible Coupling.....
Main Engine Gearbox.....
Honda Petrol Engine.....
Robin Diesel Engine.....
Base Construction.....
Removable Lifting Handles.....
Anchor Points.....
Rope Tie Offs.....

Aluminium, 100mm Dia
Worm and Wheel, 30:1 ratio
Rubber Anti-Vibration
Centrifugal 2:1 ratio
5.5 HP (4kW) 4 stroke
5.5 HP (4kW) Diesel (optional)
Anodised Aluminium fabrication
Bright zinc plated steel, rubber covered
Fitted test shackles
Built in at top of main handle

PERFORMANCE

Easy start Honda or Robin Motor.....
Method of starting.....
Emergency Stopping.....
Engine Speed Control.....
Running Time, half throttle.....
Load Retrieval Speed.....
Pulling Capacity.....
Raising Capacity.....
Recommended Rope.....
Suitable Rope Length.....

Manual Choke
Recoil Starter
Top mounted cut off switch
Throttle lever
Approximately two hours
Creep to 25m (80ft) per minute
Maximum 1000 kgs
Maximum 300 kgs
14.3mm (9/16") double braided polyester
As required, no maximum

DIMENSIONS

With Handles Removed.....
Approx. Overall Weight.....

65cm long x 39cm wide x 42cm high
50kgs (59kg for Diesel Version)



Front View



Top Detail View



View Showing Line Tied Off



Diesel Version